


AERODROME CHART - ICAO

AERODROME
CHART - ICAO

WGS-84
AD ELEV
49 FT

ATIS Tower	126.800	Ground Clearance Delivery	121.800/127.875
	118.825		125.575

MUSCAT/Muscat Intl
OMAN

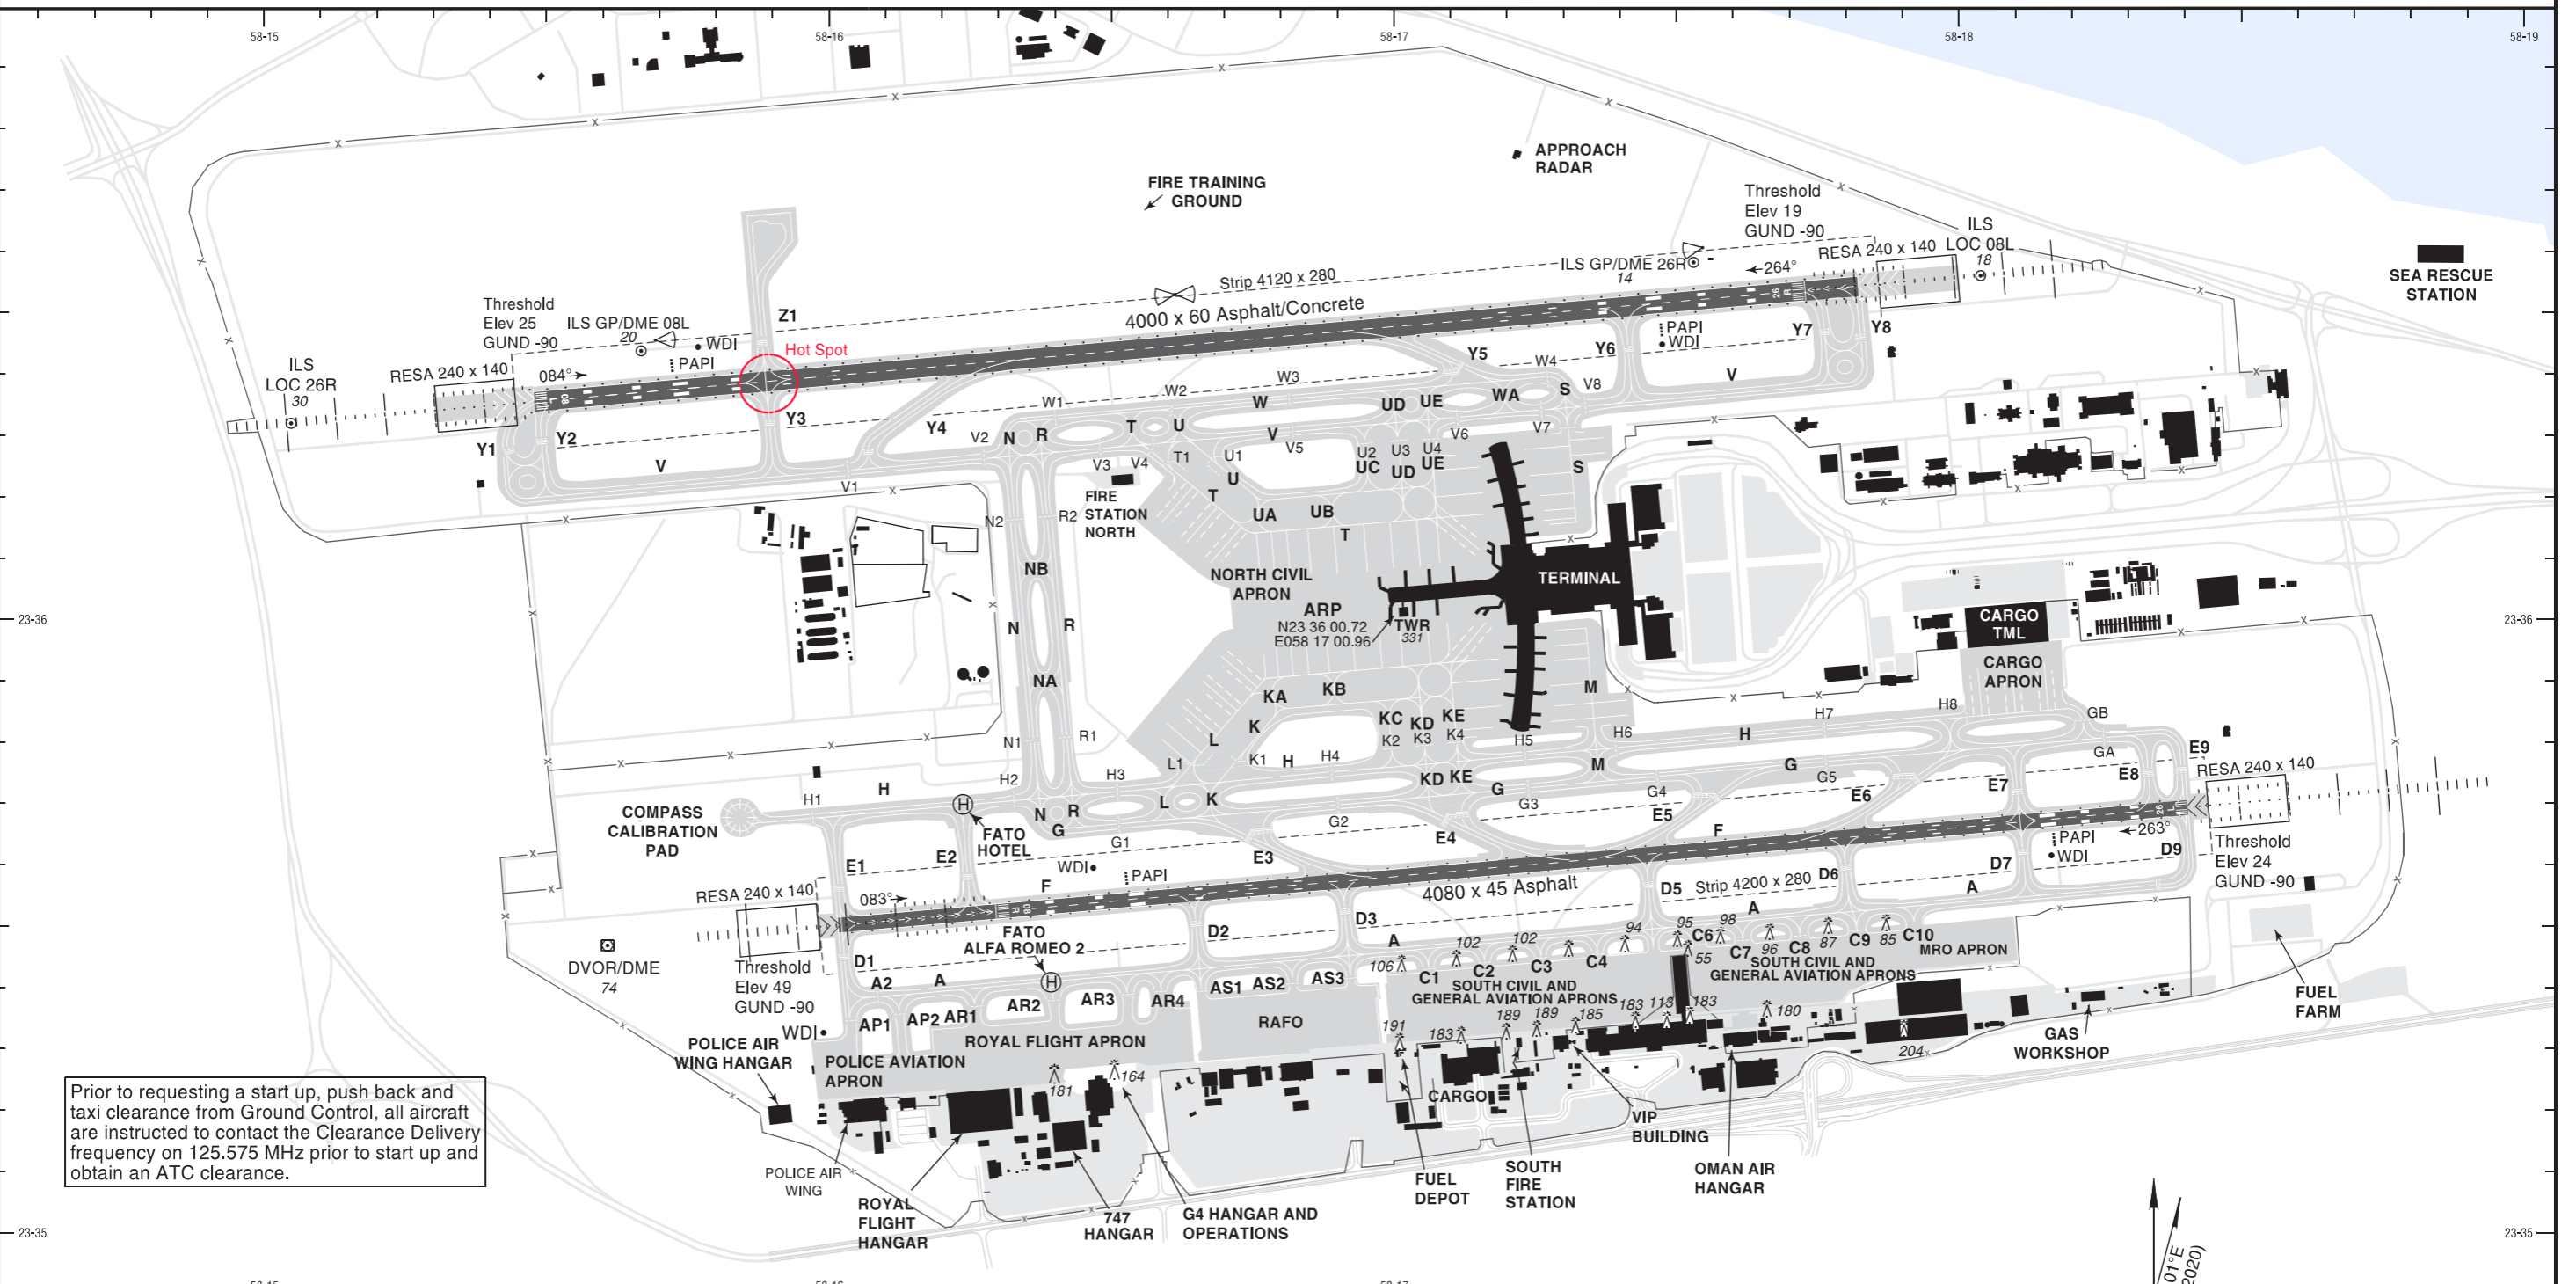

Prior to requesting a start up, push back and taxi clearance from Ground Control, all aircraft are instructed to contact the Clearance Delivery frequency on 125.575 MHz prior to start up and obtain an ATC clearance.

RWY	DIRECTION	THRESHOLD	STRENGTH	DECLARED DISTANCES				AERODROME LIGHTING	
				TORA	TODA	ASDA	LDA	RWY 08L/26R:	RWY 08R/26L:
08L Intersection Y3	085° (T)	N 23 36 21.27 E 058 15 28.69	PCN 91/F/A/W/T	4000m	4000m	4000m	4000m	ALS LIH (length 900m) PAPI-L (3.00°) REDL LIH RTHL (green) RTIL (white) RENLIH (red) RTZL LIH (white) RCLL	ALS LIH (length 900m) PAPI-L (3.00°) REDL RTHL (green) RTIL (white) RENLIH (red)
	265° (T)			3312m	3312m	3312m	3312m		
26R Intersection Y6	265° (T)	N 23 36 32.11 E 058 17 43.65	PCN 91/F/A/W/T	4000m	4000m	4000m	3840m	ALS LIH (length 900m) PAPI-L (3.00°) REDL LIH RTHL (green) RTIL (white) RENLIH (red) RTZL LIH (white) RCLL	ALS LIH (length 900m) PAPI-L (3.00°) REDL RTHL (green) RTIL (white) RENLIH (red)
	265° (T)			3306m	3306m	3306m	3306m		
08R	085° (T)	N 23 35 31.38 E 058 16 17.82	PCN 111/F/A/W/T	4080m	4080m	4080m	3600m	Twy: RETIL Blue Edge Lights Center Line Lights (green, yellow) RGL (yellow) STL (red)	Twy: RETIL Blue Edge Lights Center Line Lights (green, yellow) RGL (yellow) STL (red)
26L	265° (T)	N 23 35 41.54 E 058 18 24.31	PCN 111/F/A/W/T	4080m	4080m	4080m	4080m		

