INSTRUMENT APPROACH CHART - ICAO

AD ELEV 49 FT

HEIGHTS RELATED TO THR RWY 26R ELEV 19 FT

Muscat Information	126.800	Muscat Approach	121.200
Muscat Tower North	118.825	Muscat Ground North	127.875
Muscat Tower South	118.4	Muscat Ground South	121.800

MUSCAT/Muscat Intl
OMAN
ILS RWY 26R

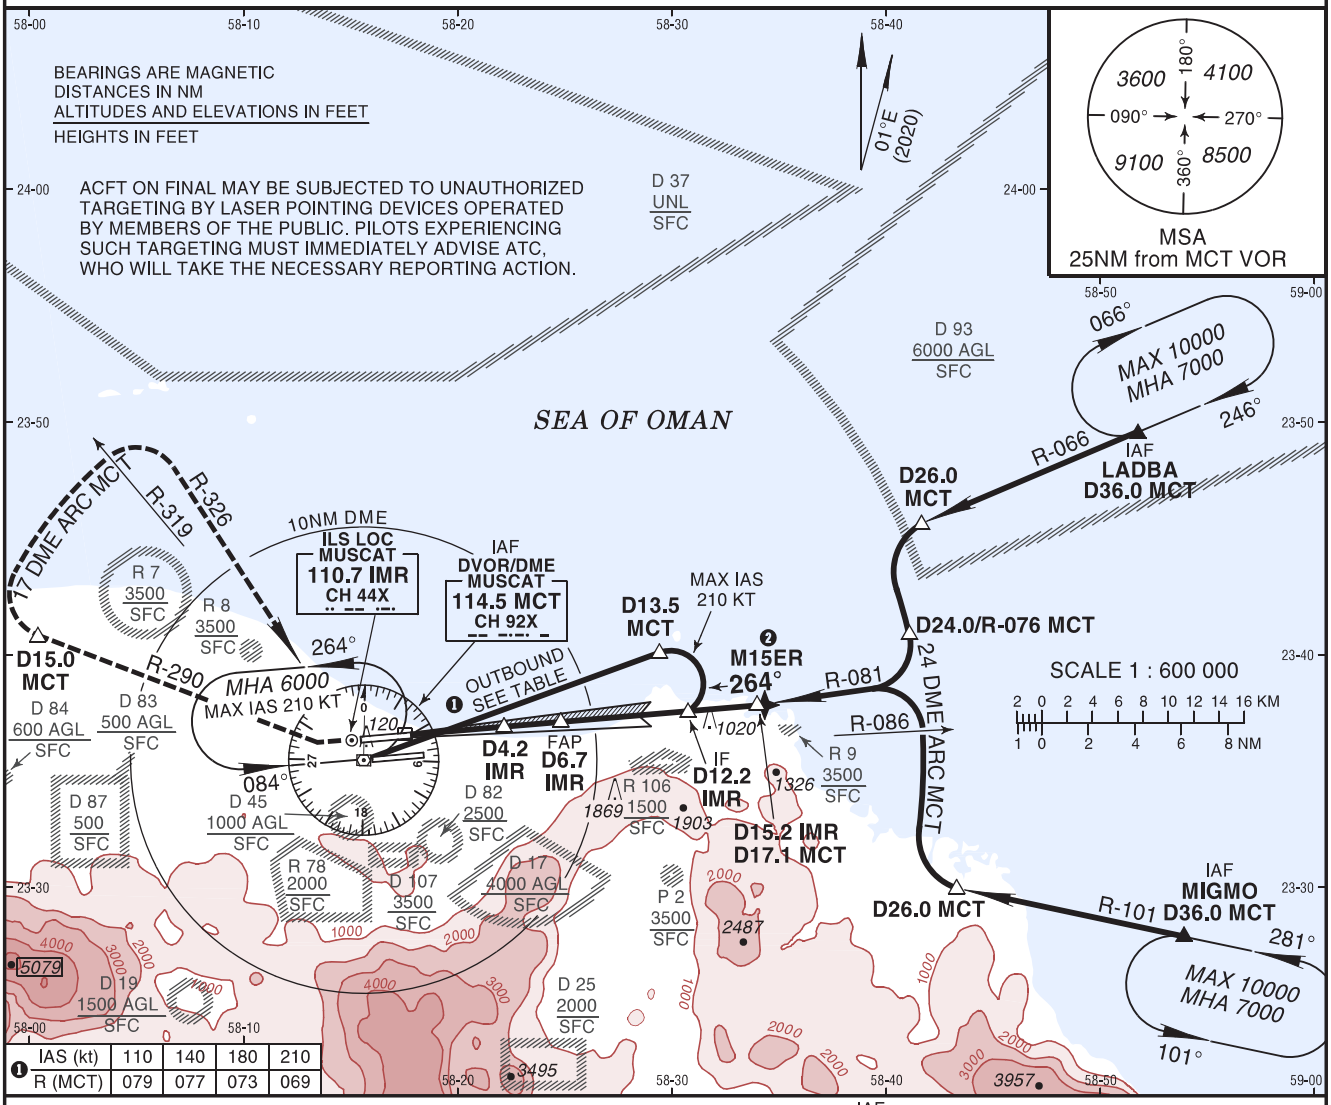

TA **13000**

MISSED APPROACH:
Climb on rwy heading to intercept and follow R-290 (minimum turn altitude *510*) till D15.0 MCT. Turn RIGHT to follow 17 DME ARC MCT. Turn RIGHT to follow R-326 direct to VOR, climb at *6000* to join the holding.

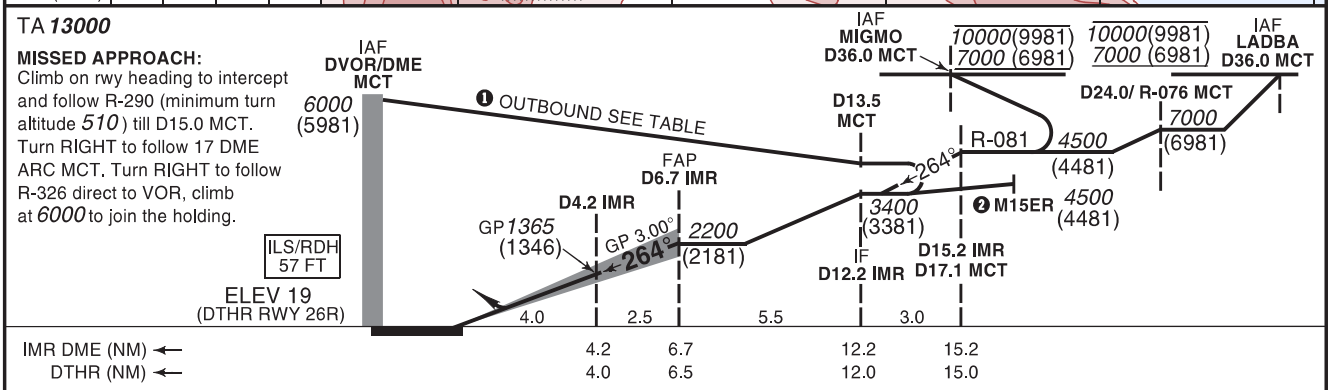

STRAIGHT-IN APPROACH		A	B	C	D
ILS CAT I	OCH	189	201	209	220
	DA(H)	*220* (200)	*230* (210)	*230* (210)	*240* (220)
	RVR	750m			
CIRCLING (HAA)* ❸		A	B	C	D
		Not Authorized			

ADVISORY INFORMATION ONLY

IMR DME	1	2	3	4	5	6
ALT (HGT)	*400* (380)	*710* (700)	*1030* (1010)	*1350* (1330)	*1670* (1650)	*1990* (1970)

GS	kt	80	100	120	140	160	180
FAP-THR	min:s	4:55	3:56	3:16	2:48	2:27	2:11
ROD: 5.24%	ft/min	425	531	637	743	849	955

❷ For INITIAL RNAV APPROACH to M15ER see Transition chart.
RNAV 1 REQUIRED.
❸ Circling not authorized.
VOR and DME or RADAR required.

Amendment: Frequency Table Updated