
AERODROME CHART — ICAO | **WGS-84** | **AD ELEV 49 FT**

Muscat Tower North	118.825	Muscat Ground North	127.875	Muscat Information	126.800
Muscat Tower South	118.4	Muscat Ground South	121.800	Muscat Clearance Delivery	125.575

MUSCAT/Muscat Intl
OMAN

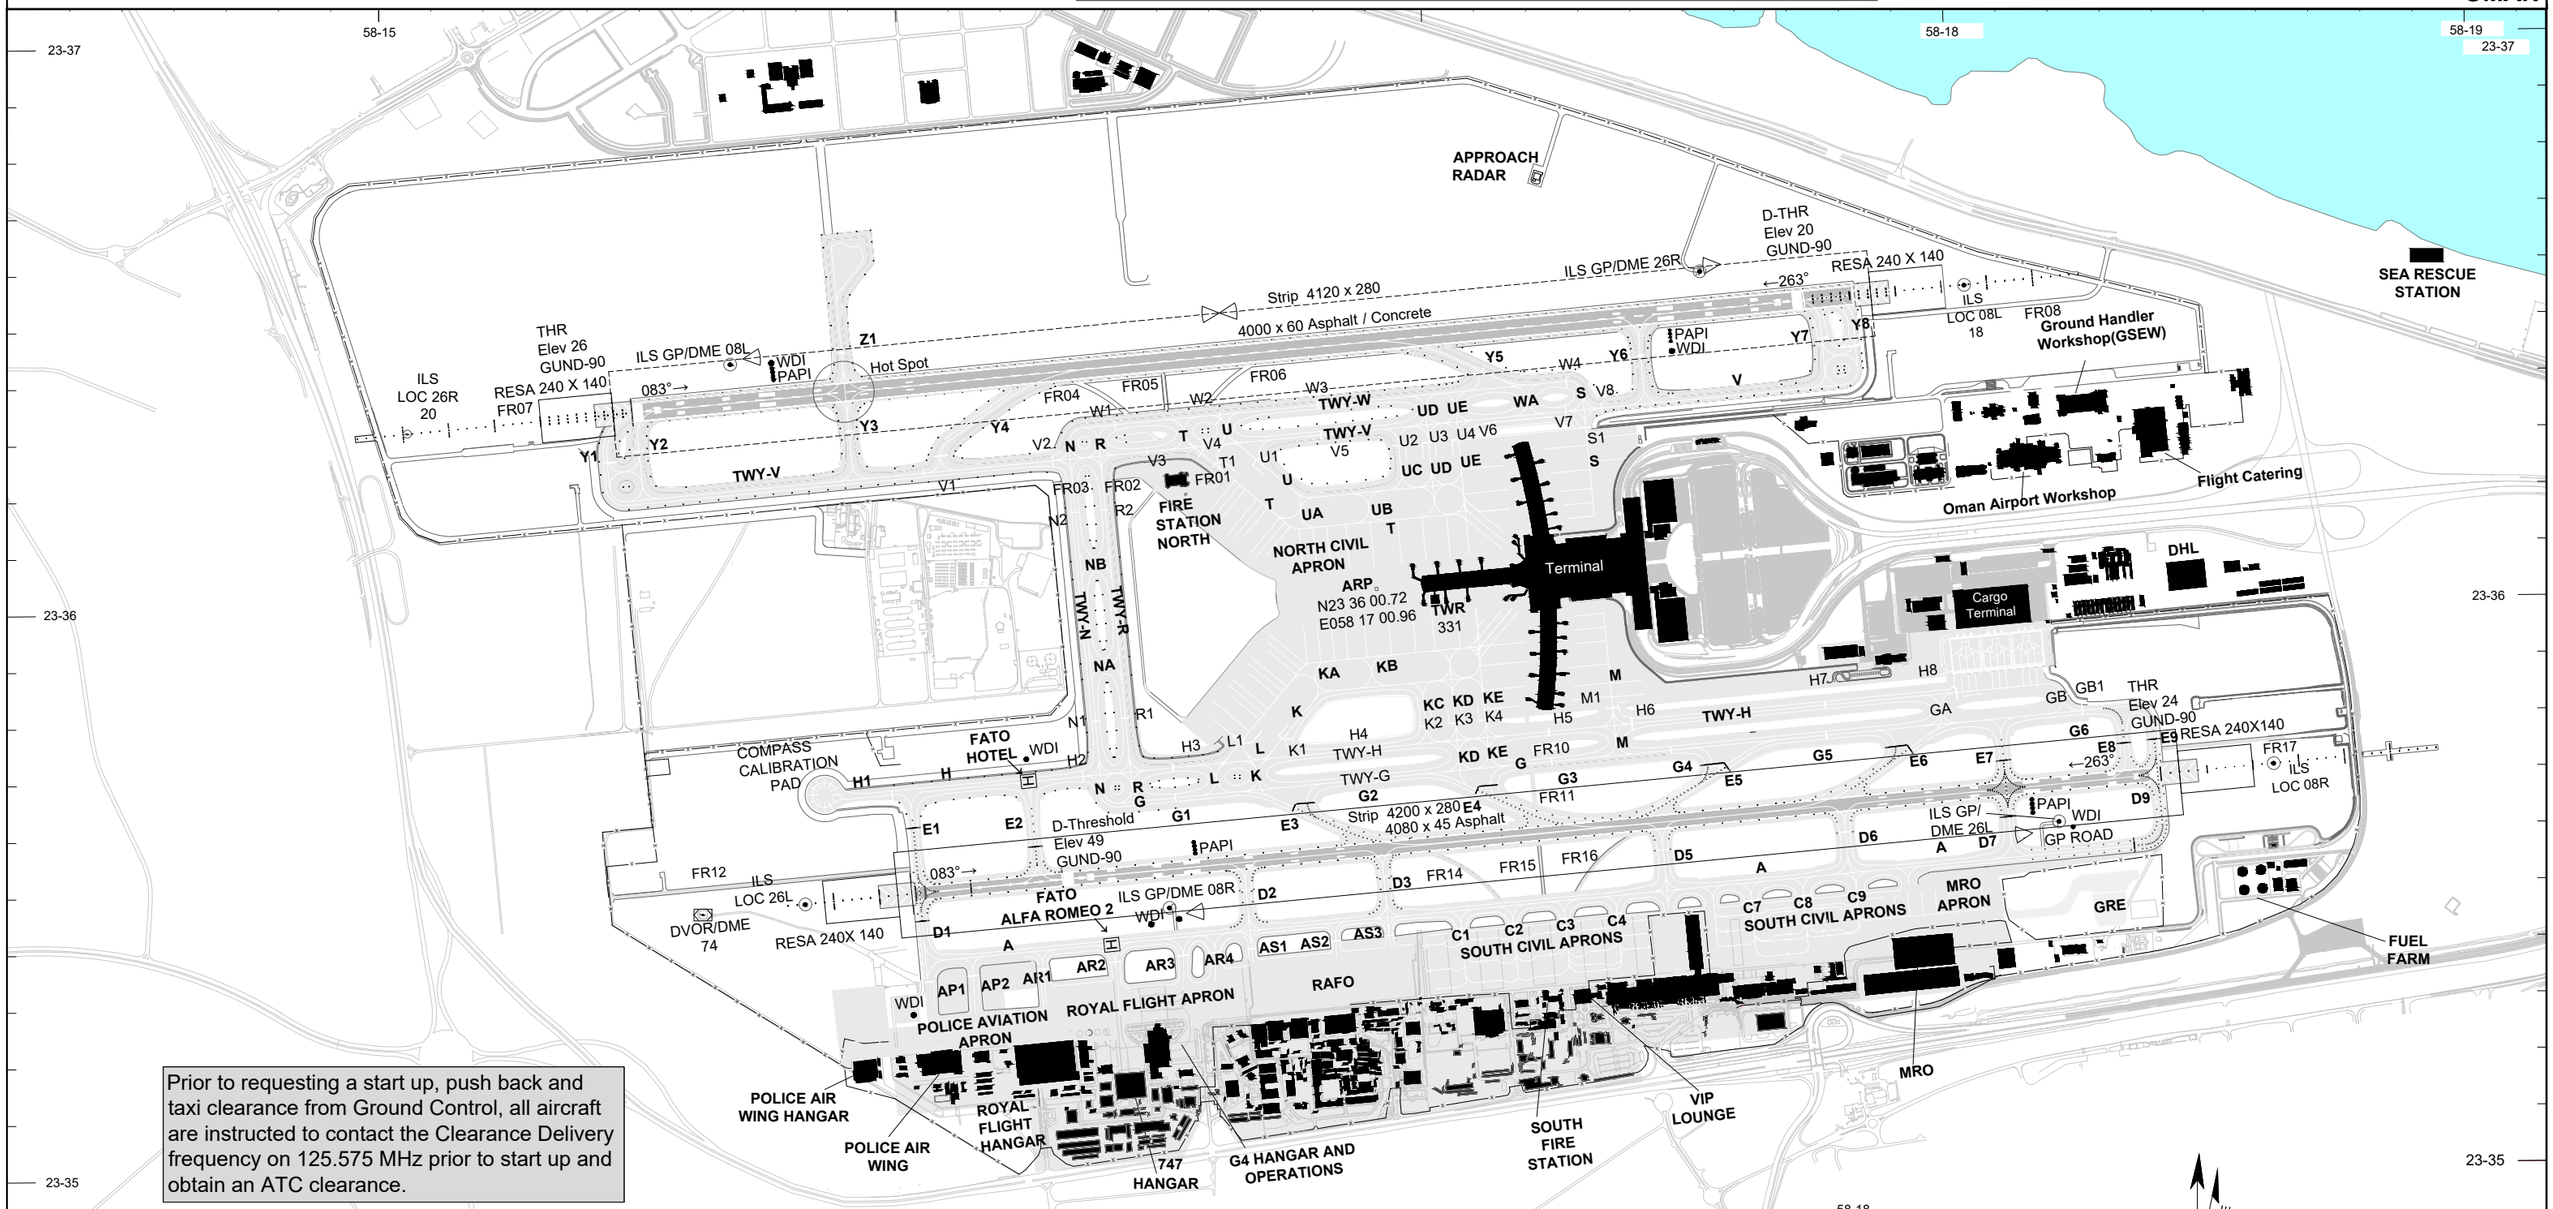

Prior to requesting a start up, push back and taxi clearance from Ground Control, all aircraft are instructed to contact the Clearance Delivery frequency on 125.575 MHz prior to start up and obtain an ATC clearance.

RWY	DIRECTION	THRESHOLD	STRENGTH	DECLARED DISTANCES (metres)			
				TORA	TODA	ASDA	LDA
08L Intersection Y3	85°(T) 85°(T)	N 23 36 21.27 E 058 15 28.63	PCN 91/F/A/W/T	4000m 3312m	4000m 3312m	4000m 3312m	4000m
26R Intersection Y6	265°(T) 265°(T)	N 23 36 32.57 E 058 17 49.30	PCN 91/F/A/W/T	4000m 3306m	4000m 3306m	4000m 3306m	3840m
08R	85°(T)	N 23 35 30.02 E 058 16 00.92	PCN 91/F/A/W/T	4080m	4080m	4080m	3600m
26L	265°(T)	N 23 35 41.54 E 058 18 24.31	PCN 91/F/A/W/T	4080m	4080m	4080m	4080m

AERODROME LIGHTING	
RWY 08L/26R:	RWY 08R/26L:
ALS LIH (length 900m) PAPI-L (3.00°) RED LIH RTHL (green) RTIL (white) RENL LIH (red) RTZL LIH (white) RCLL	ALS LIH (length 900m) PAPI-L (3.00°) RED RTHL (green) RTIL (white) RENL LIH (red)
RWY: RETIL Blue Edge Light	RWY: RETIL Blue Edge Light Center Line Lights(green, yellow) RED (yellow) STL (red)

VAR 02°E (2025)
Annual rate of change 0.05°E

BEARINGS ARE MAGNETIC
DIMENSIONS IN METRES
ELEVATIONS IN FEET

SCALE 1 : 20 000

100 0 100 200 300 400 500 M
500 0 500 1000 1500 FT

AMENDMENT : IHP Updated.