


MUSCAT/Muscat Intl
OMAN
RNP RWY 26R

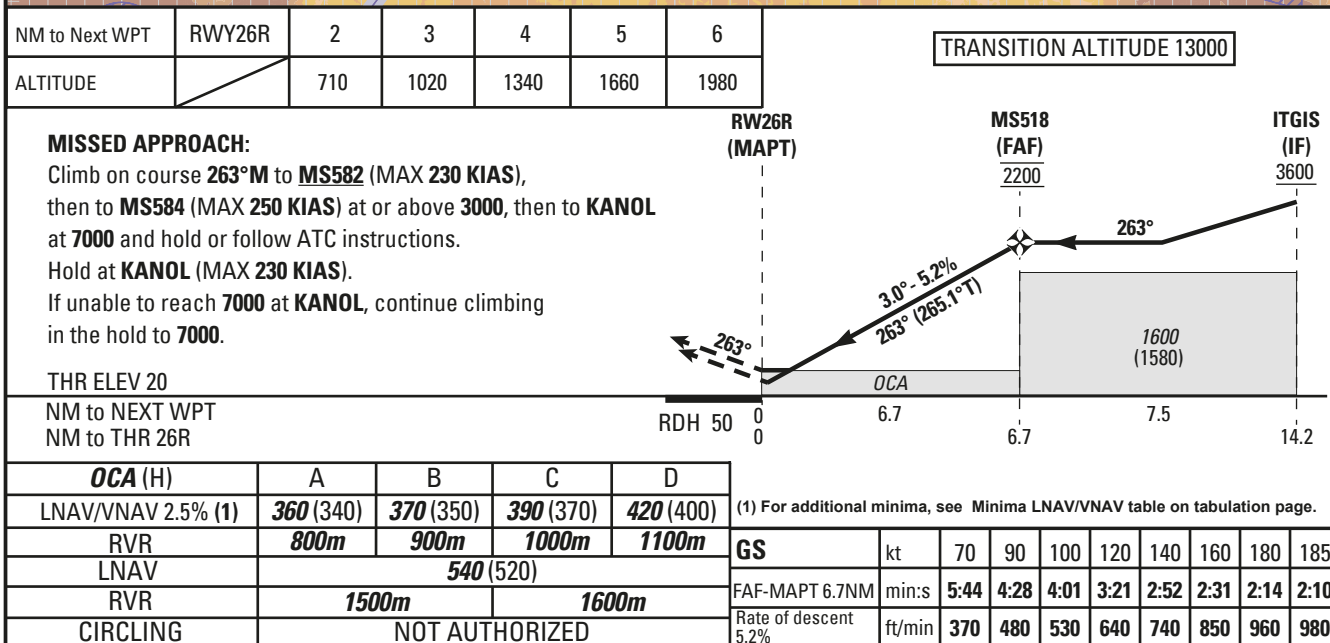

Route Description: RNP RWY 26R

Serial Number	Path Descriptor	Waypoint Identifier	Coordinates	Fly-over	Course °M (°T)	Magnetic Variation	Distance (NM)	Turn direction	Altitude (FT)	Speed (KT)	VPA/TCH (°/FT)	Navigation Specification
001	IF	SUTPA	23°30'44.7310"N 058°39'13.4150"E	-	-	-	-	-	+6000	-	-	RNP APCH
002	TF	UMAGO	23°38'10.8410"N 058°38'32.4080"E	-	353 (355.2)	1.8°E	7.4	-	+4500	-	-	RNP APCH
003	TF	ITGIS	23°37'45.4770"N 058°33'08.1590"E	-	263 (265.2)	1.8°E	5.0	-	+3600	-	-	RNP APCH
001	IF	OBNEG	23°44'22.5310"N 058°37'58.2540"E	-	-	1.8°E	-	-	+6500	-	-	RNP APCH
002	TF	UMAGO	23°38'10.8410"N 058°38'32.4080"E	-	173 (175.2)	1.8°E	6.2	-	+4500	-	-	RNP APCH
003	TF	ITGIS	23°37'45.4770"N 058°33'08.1590"E	-	263 (265.2)	1.8°E	5.0	-	+3600	-	-	RNP APCH
001	IF	ITGIS	23°37'45.4770"N 058°33'08.1590"E	-	-	1.8°E	-	-	+3600	-	-	RNP APCH
002	TF	MS518	23°37'06.8740"N 058°24'59.2790"E	-	263 (265.1)	1.8°E	7.5	-	@2200	-	-	RNP APCH
003	TF	RW26R	23°36'32.1228"N 058°17'43.6649"E	Y	263 (265.1)	1.8°E	6.7	-	@70	-	-3.0/ 50	RNP APCH
004	CF	MS582	23°36'19.0400"N 058°15'00.9340"E	Y	263 (265.0)	1.8°E	2.5	-	-	- 230	-	RNP APCH
005	TF	MS584	23°42'27.1380"N 057°56'15.1660"E	-	288 (289.6)	1.8°E	18.3	-	+3000	- 250	-	RNP APCH
006	TF	MS586	23°50'05.8030"N 057°48'07.4950"E	-	314 (315.6)	1.8°E	10.7	-	-	-	-	RNAV 1
007	TF	KANOL	23°52'57.8700"N 057°45'04.1800"E	-	314 (315.6)	1.8°E	4.0	-	+7000	-	-	RNAV 1
008	HM	KANOL	23°52'57.8700"N 057°45'04.1800"E	Y	120 (122.0)	1.8°E	1 MIN	R	@7000	- 230	-	RNAV 1

Minima LNAV / VNAV

Standard LNAV / VNAV OCA/H below are determined for ACFT capable to maintain a climbing slope greater than 2.5% during a missed APCH in LNAV/VNAV.

Slope in missed approach	OCA (H)			
	A	B	C	D
3.0%	340 (320)	350 (330)	370 (350)	400 (380)
RVR	700m	800m	900m	1000m
4.0%	310 (290)	320 (300)	350 (330)	380 (360)
RVR	650m		800M	900M
5.0%	300 (280)	310 (290)	330 (310)	360 (340)
RVR	600m	650m	700m	800m