
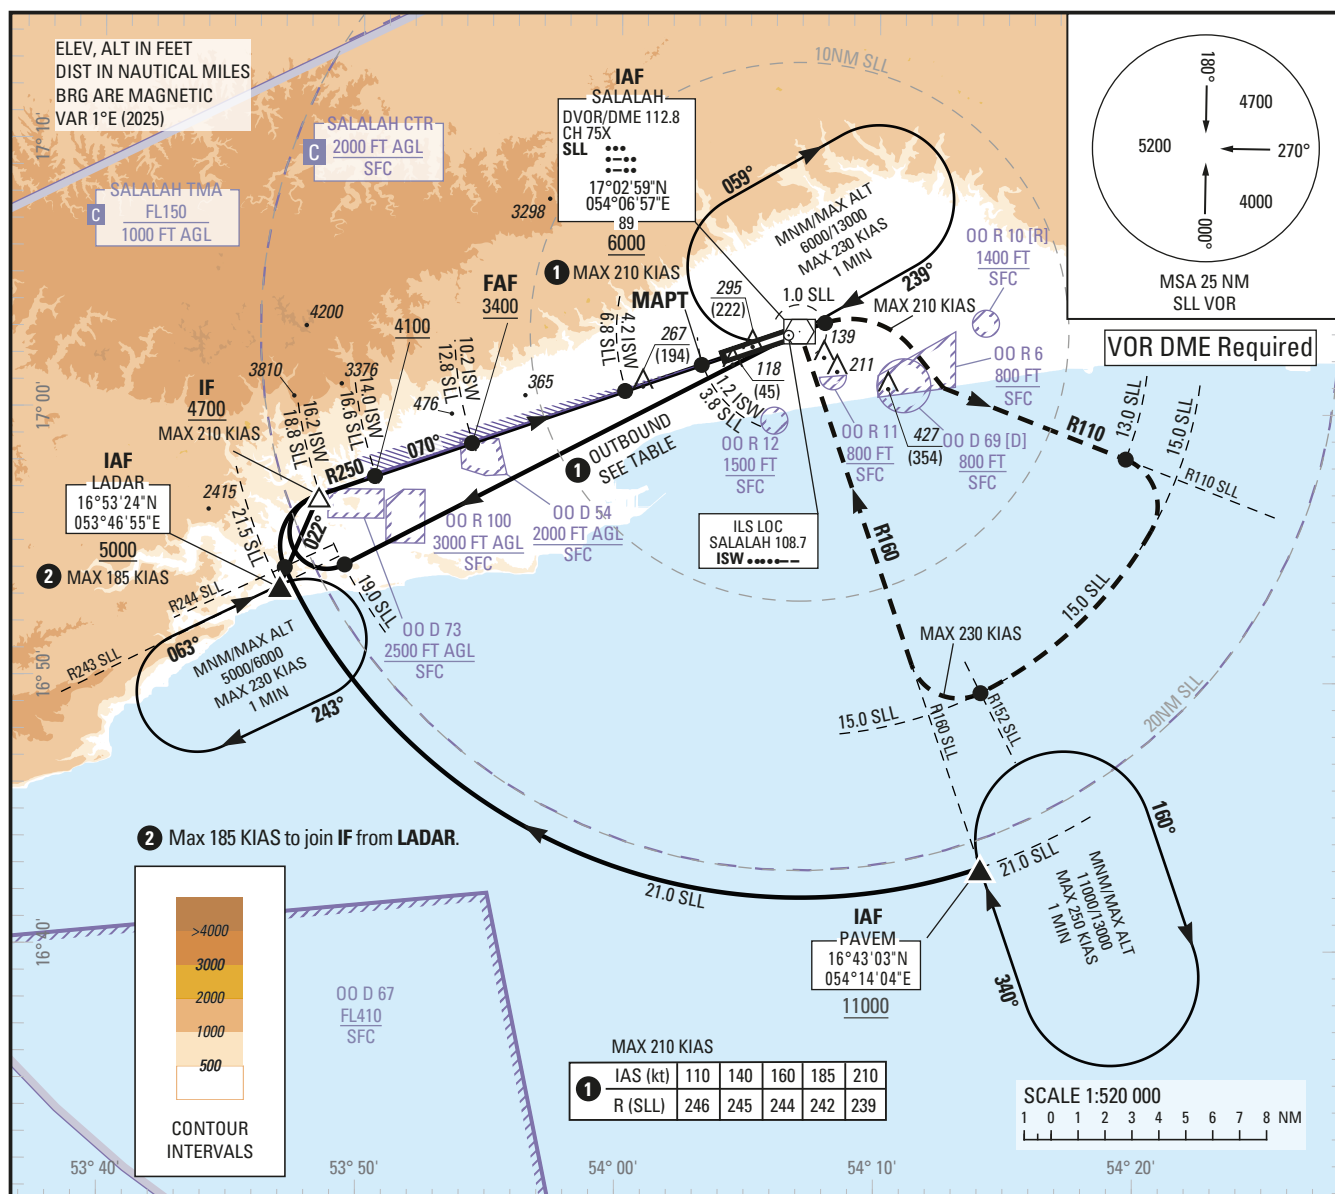


INSTRUMENT
APPROACH
CHART - ICAOAD ELEV 90 FT
HEIGHTS RELATED TO
THR RWY 07 ELEV 73 FTATIS 125.100 GND 124.025
APP/RAD 119.100
TWR 118.200SALALAH/Salah
OMAN
ILS or LOC RWY 07

TRANSITION ALTITUDE 13000

DME ISW (NM)	10	9	8	7	6	5	4	3	2	1
ALT (HGT)	3340 (3267)	3010 (2937)	2670 (2597)	2340 (2267)	2010 (1937)	1690 (1617)	1360 (1287)	1040 (967)	710 (637)	390 (317)

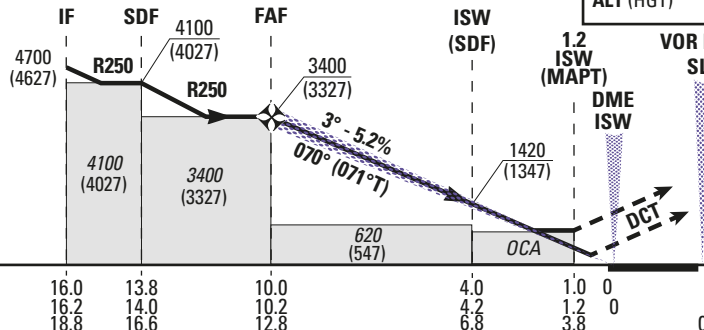

MISSED APPROACH: Max 210 KIAS

Climb direct to SLL, then follow R 070 SLL. At 1.0 DME SLL, turn right to intercept and follow R 110 SLL. At 13.0 DME SLL, turn right to intercept and follow 15.0 DME SLL. Crossing R 152 SLL, turn right to intercept and follow R 160 SLL to SLL (Max 230 KIAS), climbing to 6000. At SLL, hold or follow ATC instructions. If unable to reach 6000 over SLL, continue climbing in the hold to 6000.

THR ELEV 73

NM to THR RWY 07
NM to ISW
NM to DME SLL

(1) Not authorized north of RWY 07/25

GS	kt	70	90	100	120	140	160	180	185
FAF-MAPT (9.0 NM)	min:s	7:43	6:00	5:24	4:30	3:51	3:23	3:00	2:55
Rate of descent	ft/min	370	480	530	640	740	850	960	980