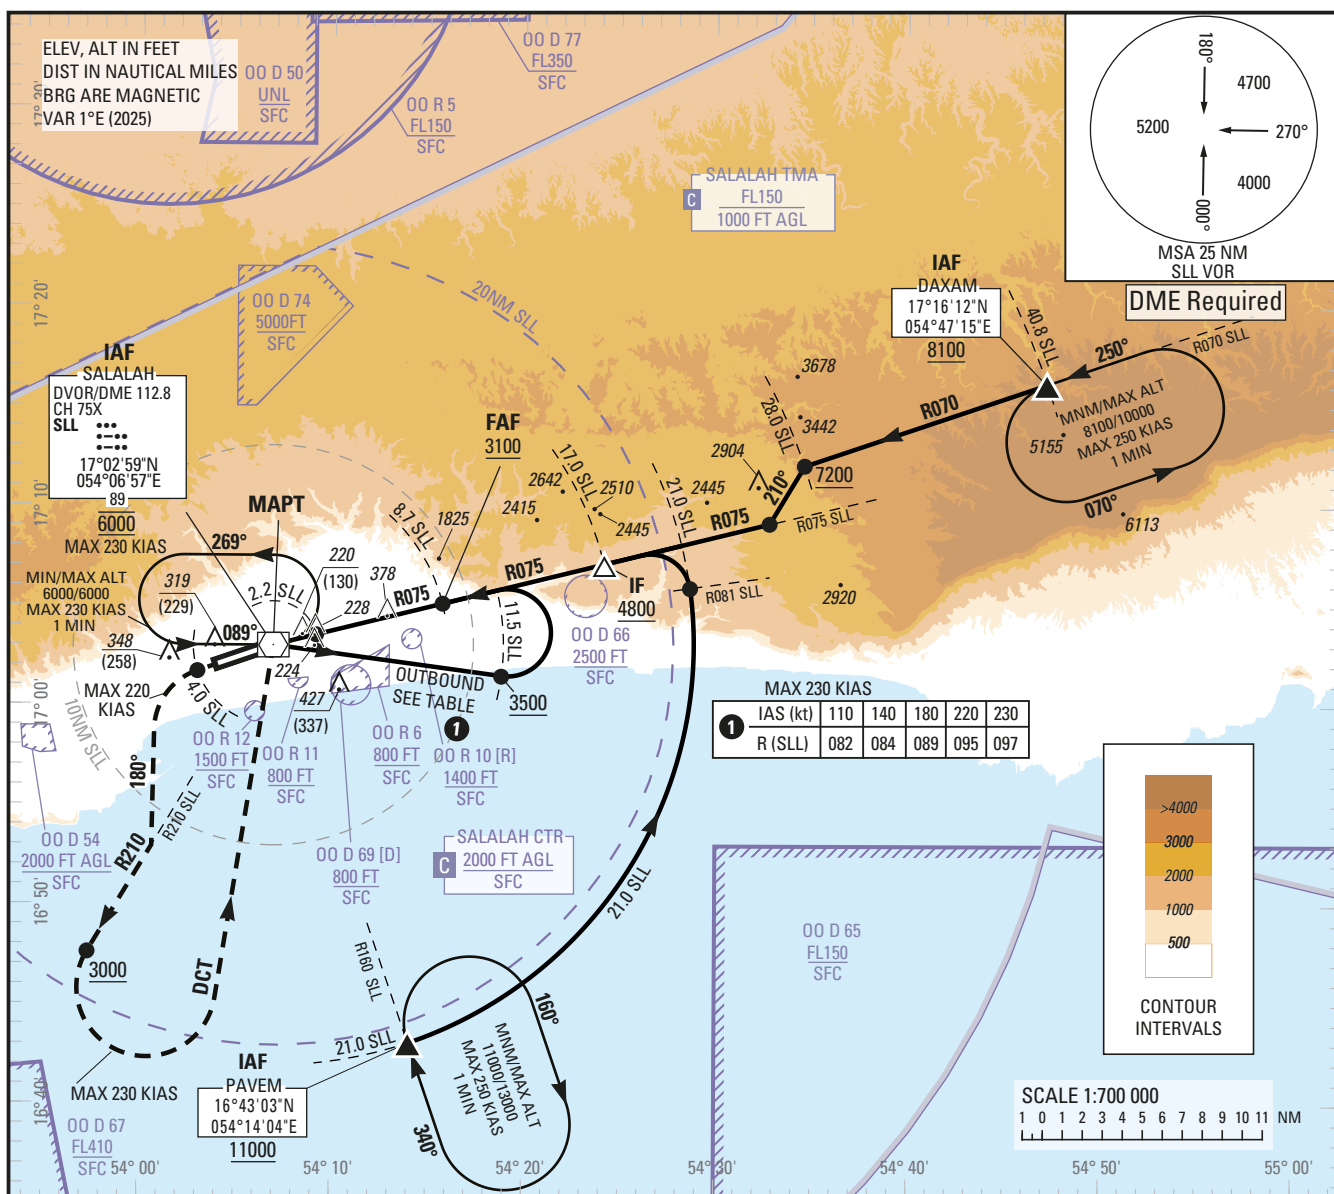


INSTRUMENT
APPROACH
CHART - ICAOAD ELEV 90 FT
HEIGHTS RELATED TO
AD ELEV 90 FT

ATIS	125.100	GND	124.025
APP/RAD	119.100		
TWR	118.200		

SALALAH/Salalah
OMAN
VOR RWY 25

TRANSITION ALTITUDE 13000

1	2	3	4	5	6	7	8	DME SLL (NM)
660 (570)	970 (880)	1290 (1200)	1610 (1520)	1920 (1830)	2240 (2150)	2550 (2460)	2870 (2780)	ALT (HGT)

MISSED APPROACH:


Max 220 KIAS. Climb on R250 SLL. At 4.0 DME SLL turn left heading 180° to intercept and follow R210 SLL. At 3000 turn left direct to SLL (Max 230 KIAS) climbing to 6000.

At SLL, hold or follow ATC instructions.

If unable to reach 6000 over SLL, continue climbing in the hold to 6000.

AD ELEV 90

TCH 50

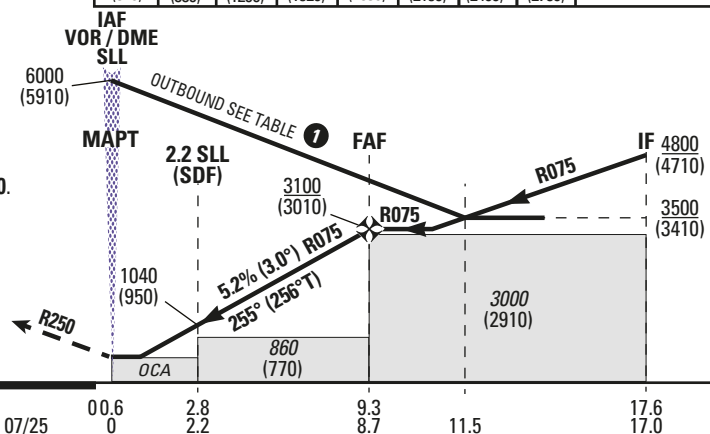NM to THR RWY 25
NM to SLL

(1) Not authorized north of RWY 07/25

Straight-in Approach	OCA (H)	A	B	C	D
	VOR	470 (380)			
	RVR (m)	1000			
	CIRCLING (1)	620 (530)	650 (560)	830 (740)	
	RVR (m)	1500	1600	2400	3600

GS	kt	70	90	100	120	140	160	180	185
FAF-MAPT (8.7 NM)	min:s	7:27	5:48	5:13	4:21	3:44	3:16	2:54	2:49
Rate of descent	ft/min	370	470	530	630	740	840	950	970