AERODROME CHART - ICAO

ARP 242309.98N 0563732.23E

AD ELEVATION 144FT

Suhar Information 118.725


SUHAR/ Suhar OMAN

BEARINGS ARE MAGNETIC
ELEVATIONS AND HEIGHTS ARE IN FEET

ELEVATIONS IN FEET AMSL
HEIGHTS IN FEET ABOVE AD

RUNWAY/TAXIWAY/APRON PHYSICAL CHARACTERISTICS

APRON/RWY	SURFACE	BEARING STRENGTH
RWY 15/33	Asphalt	PCN 82/F/B/W/T
TAXIWAY C2,C3,J	Asphalt	PCN 82/F/B/W/T
TAXIWAY B4	Concrete	PCN 35/R/B/Z/T
MAIN APRON	Concrete	PCN 83/R/B/W/T
GA APRON	Concrete	PCN 35/R/B/Z/T

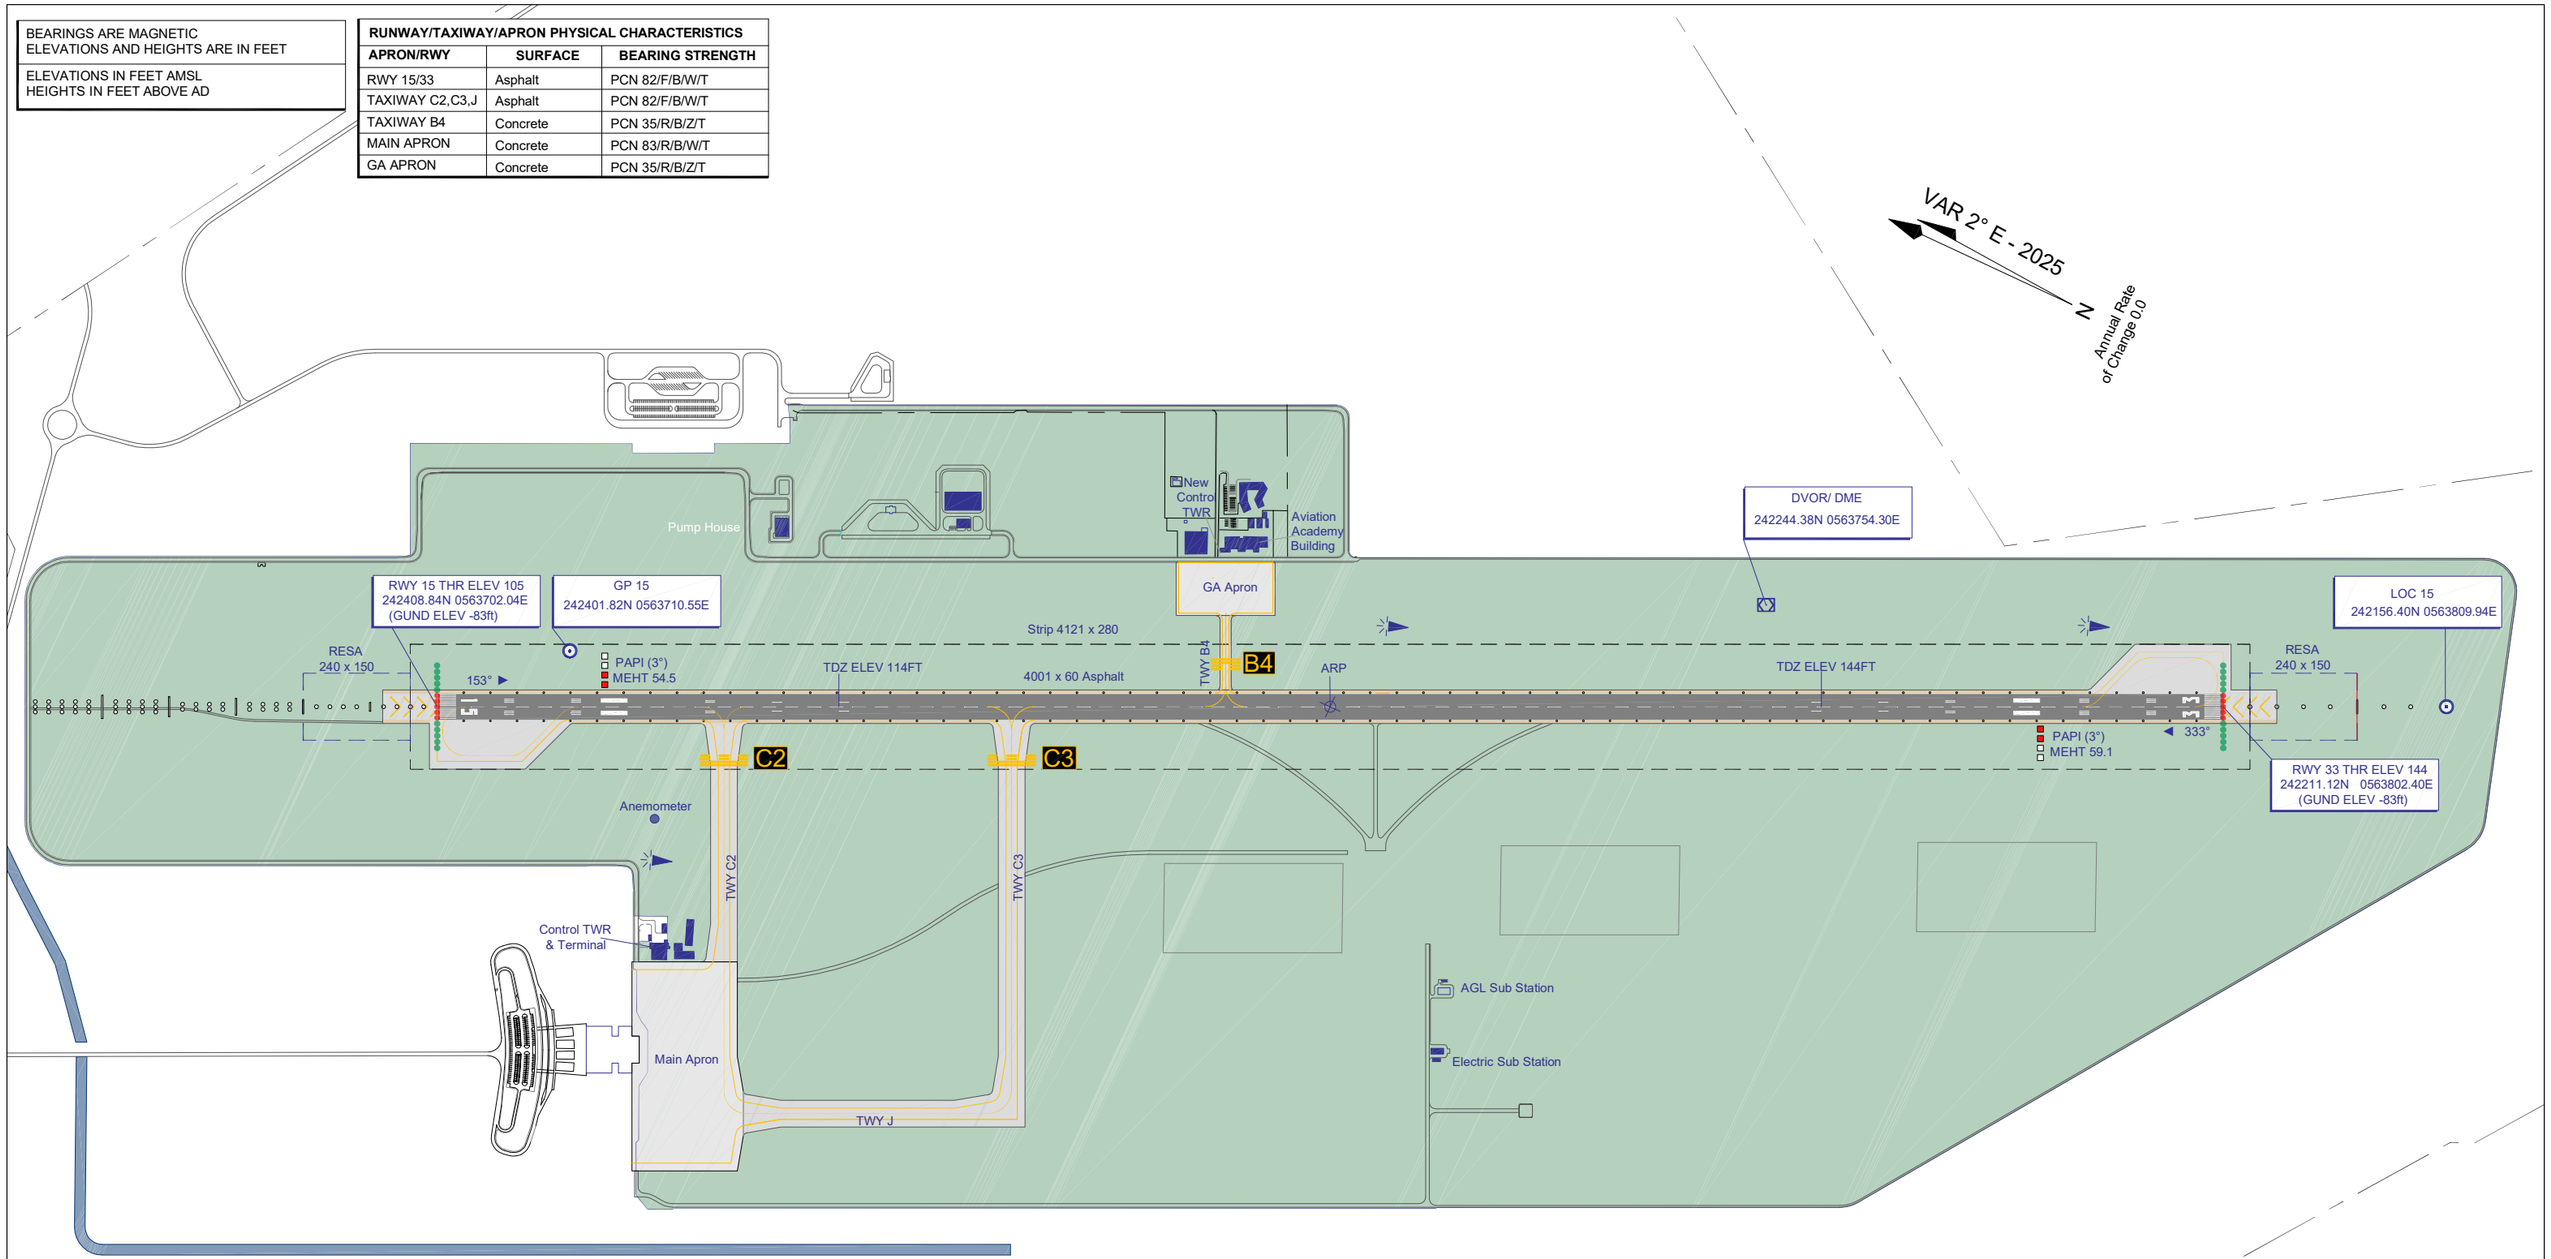

300 200 100 0 500 1000 metres
1000 500 0 500 1000 1500 2000 2500 3000 3500 feet

LIGHTING

RWY 15	ALS LIH (900m), RTHL, PAPI-L (3.00°), RCLL, REDL, RENL
RWY 33	SALS LIM (420m), RTHL, PAPI-L (3.00°), RCLL, REDL, RENL

DECLARED DISTANCES (metres)

RWY	TWY	TORA	TODA	ASDA	LDA
15		4001	4001	4001	4001
33		4001	4001	4001	4001
15	B4	2242	2242	2242	
33	B4	1774	1774	1774	
15	C2	3371	3371	3371	
15	C3	2727	2727	2727	
33	C3	1299	1299	1299	

CHANGE: RWY Strip Dimension changed.