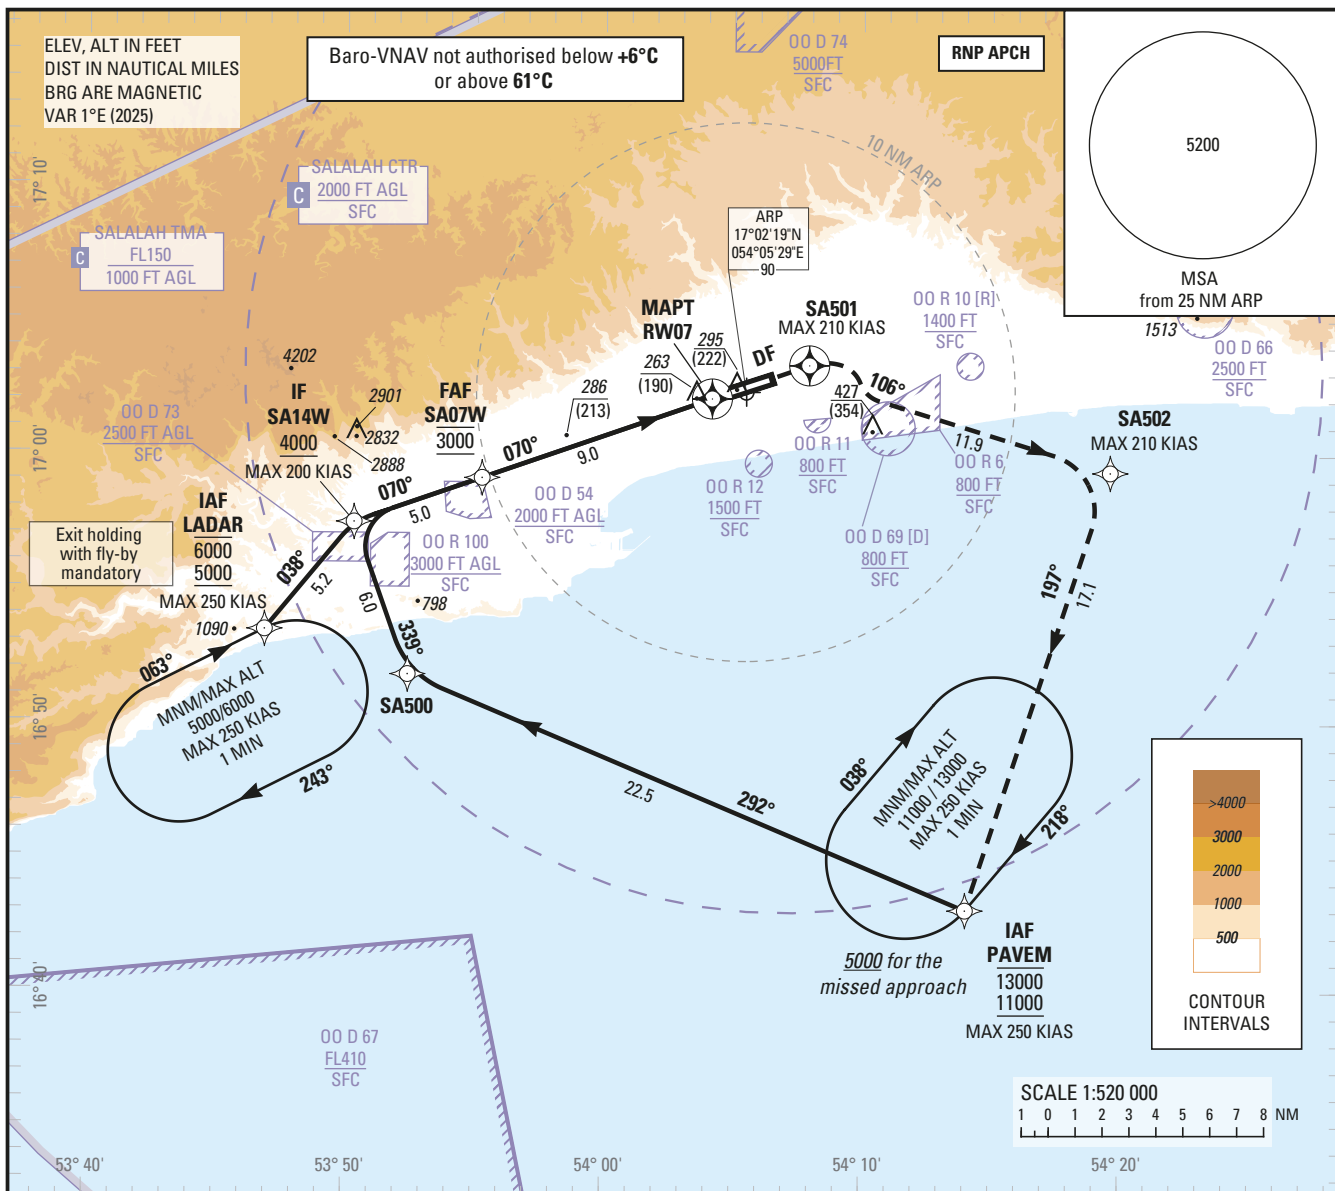


INSTRUMENT
APPROACH
CHART - ICAO

AD ELEV 90 FT


HEIGHTS RELATED TO
THR RWY 07 ELEV 73 FT

ATIS	125.100	GND	124.025
APP/RAD	119.100		
TWR	118.200		

SALALAH/Salalah
OMAN
RNP RWY 07

TRANSITION ALTITUDE 13000

8	7	6	5	4	3	2	RWY07	NM to THR
2670 (2597)	2360 (2287)	2040 (1967)	1720 (1647)	1400 (1327)	1080 (1007)	760 (687)		
								ALT (HGT)

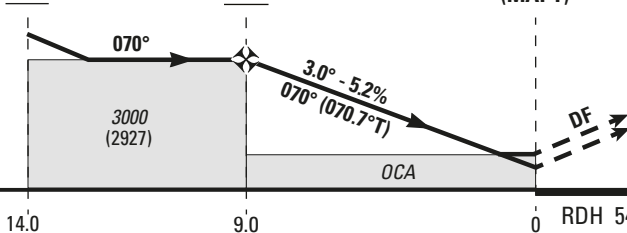SA14W
(IF)
4000SA07W
(FAF)
3000RWY07
(MAPT)

MISSED APPROACH:

Climb direct to **SA501**. Then turn **right** to **SA502** on course **106° M** (MAX 210 KIAS) then to **PAVEM** at or above **5000** to hold or follow ATC instructions. If unable to reach **5000** at **PAVEM**, continue to climb in the hold to **5000**.

THR ELEV 73

NM to THR RWY 07

OCA (H)	A	B	C	D
LNAV/VNAV	386 (313)	398 (325)	406 (333)	415 (343)
RVR (m)	700	800	800	900
LNAV	540 (467)			
RVR (m)	1500			
CIRCLING (1)	590 (517)		830 (757)	
RVR (m)	1500	1600	2400	3600

(1) Not authorized north of RWY 07/25

GS	kt	70	90	100	120	140	160	185
FAF-MAPT (9.0 NM)	min:s	7:44	6:00	5:25	4:31	3:52	3:23	2:56
Rate of descent	ft/min	370	480	530	640	740	850	980

Holding: RNP RWY 07

Path Descriptor	Waypoint Identifier	Coordinates	Inbound Course °M (°T)	Leg Distance	Turn direction	Minimum Altitude (ft/FL)	Maximum Altitude (ft/FL)	Speed Limit (kt)	Magnetic Variation	Navigation Specification
Hold	PAVEM	16°43'03.000"N 054°14'04.300"E	218 (219.0)	1 min	R	11000	13000	-250	+1.06	RNAV 1
Hold	LADAR	16°53'24.000"N 053°46'55.000"E	063 (064.0)	1 min	R	5000	6000	-250	+1.06	RNAV 1

Route Description: RNP RWY 07

Serial Number	Path Descriptor	Waypoint Identifier	Coordinates	Fly-over	Course °M (°T)	Magnetic Variation	Distance (NM)	Turn direction	Altitude (FT)	Speed (KT)	VPA/TCH (°/FT)	Navigation Specification
10	IF	PAVEM	16°43'03.000"N 054°14'04.300"E	-	-	-	-	-	-13000 +11000	-250	-	RNP APCH
20	TF	SA500	16°51'44.700"N 053°52'27.400"E	-	292 (292.7)	+1.06	22.5	-	-	-	-	RNP APCH
30	TF	SA14W	16°57'24.722"N 053°50'21.191"E	-	339 (340.3)	+1.06	6.0	-	+4000	-200	-	RNP APCH
10	IF	LADAR	16°53'24.000"N 053°46'55.000"E	-	-	-	-	-	-6000 +5000	-250	-	RNP APCH
20	TF	SA14W	16°57'24.722"N 053°50'21.191"E	-	038 (039.5)	+1.06	5.2	-	+4000	-200	-	RNP APCH
10	IF	SA14W	16°57'24.722"N 053°50'21.191"E	-	-	-	-	-	+4000	-200	-	RNP APCH
20	TF	SA07W	16°59'04.538"N 053°55'17.677"E	-	070 (070.7)	+1.06	5.0	-	@3000	-	-	RNP APCH
30	TF	RW07	17°02'03.7298"N 054°04'11.0560"E	Y	070 (070.7)	+1.06	9.0	-	@127	-	-3.0/ 54	RNP APCH
40	DF	SA501	17°03'19.300"N 054°07'56.500"E	Y	-	-	-	-	-	-210	-	RNP APCH
50	CF	SA502	16°59'22.400"N 054°19'36.600"E	-	106 (107.1)	+1.06	11.9	R	-	-210	-	RNP APCH
60	TF	PAVEM	16°43'03.000"N 054°14'04.300"E	-	197 (198.1)	+1.06	17.1	-	+5000	-250	-	RNP APCH
70	HM	PAVEM	16°43'03.000"N 054°14'04.300"E	Y	218 (219.0)	+1.06	-	R	+5000	-250	-	RNAV 1